



BASE DRUM HEATER - HBD

ADVANTAGES

Base drum heater mod. HBD for metal drums max. 200L, ideal for reducing the viscosity of materials such as soap, grease, resins, paints that must be easily pumped or vacuumed.

CONSTRUCTION

Produced with two 2mm thick mild steel for extra rigidity on uneven surfaces, with tapered edges for safe ease of drum location and is protected by a resilient high temperature coating.


Heating is provided by a 900W flat silicone heating element characterized by perfect heat distribution over the entire surface.

Insulated with 50mm of high-density rock wool, it guarantees a high efficiency of heat conduction towards the base of the drum to be heated.

CHARACTERISTICS


PLUS

- Robust metal construction
- Insulation class IP40
- Adjustable thermostat 0°C -150°C
- Standard dimensions: for 200L drums
- 2m armoured power cable
- Easy to install

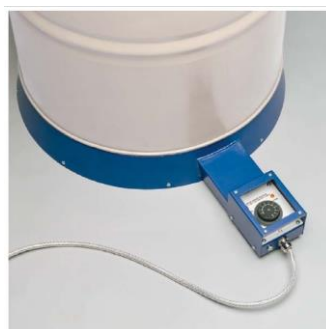

TECHNICAL DETAILS

- Supply voltage: 110V or 230V
- Power consumption 900W
- Control temperature: 20-150°C
- Base dimension: 600mm
- Heating surface diameter: 550mm
- Height: 70mm
- Control unit: 105mm height
280mm arm

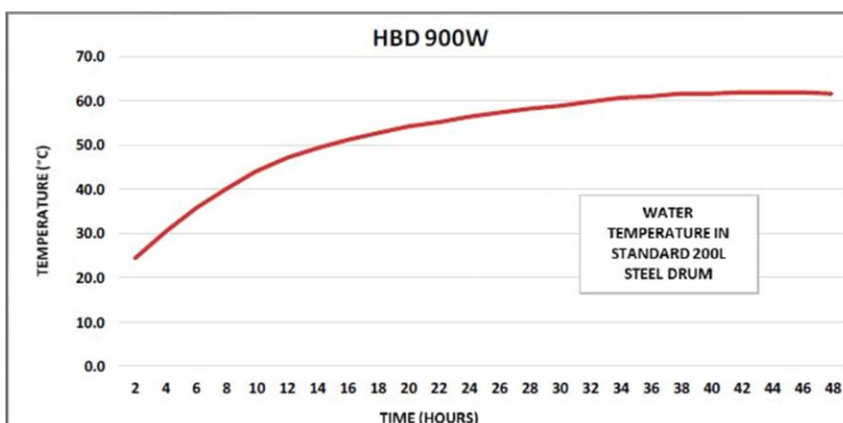

Certified organization TÜV AUSTRIA ITALIA S.P.A.
• ISO 9001:2015 with certificate n°Q-2523-17
• ISO 45001:2018 with certificate n°S-2523-19
• ISO 14001:2015 with certificate n°A-2523-24